

Cup Ball Type Analog LC Model : ACB A30, A40



Salient Features

- Specifically designed cables suitable for harsh environment and better noise immunity
- 16 meter standard cable length
- One year warranty against any manufacturing defect
- Strong technical support for field or design related issues


Connections

Excitation +	:	Red
Excitation -	:	Black
Signal +	:	Blue
Signal -	:	White

Rated Load	D1	D2	H	L
30	85-88	76.2	224.7	240
40	88	76.2	230.7	240

Technical Specifications

Rated capacities (Emax)	30, 40t
Sensitivity	2.0 ± 0.002 mV/V
Zero balance	±0.1 % F.S.
TC ZERO	±0.015 % F.S. /10°C
TC SPAN	±0.015 % F.S. /10°C
Operating temp range	-35°C ~ +70°C
Input impedance	750 ± 10Ω
Output impedance	702 ± 3Ω / 703 ± 5 Ω
Insulation impedance	>5000MΩ
Maximum safe overload	175 % F.S.
Ultimate overload	300 % F.S.
Recommend excitation	8 ~ 12V DC
Max excitation	15V DC
Protection class	IP68
Accuracy class	C3
Sealing	Laser Welded
Material	Alloy steel
Cable Length	16m

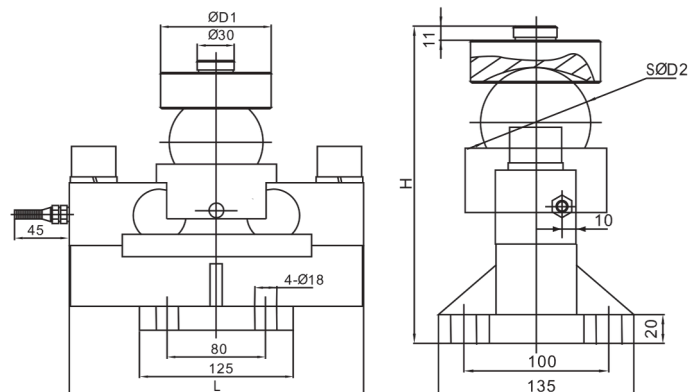

Marketed by :

Kanta King

C-25, 2nd Floor, DSIDC Complex, Kirti Nagar,
New Delhi - 110015, INDIA

+91.9560915555

info@kantaking.com

www.kantaking.com

VOCAL
FOR
LOCAL